

Quality Door and Window Fittings

(Timber)

NT 'R' HINGE

CONCEALED TILT BEFORE TURN


T3 0907 Product by ROTO

GROUPCO - T3 0907

The ROTO NT "R" Hinge Tilt and Turn System is designed for use on PVCU, Timber and Aluminium systems with a eurogroove and 12mm fittings clearance.

- All parts are preset for easy fitting
- All hinges are concealed and fully adjustable
- 16mm width profiled faceplate gives extra support to cam collars
- Modular design means fewer parts
- Patented Clip & Fit system for ease of connection
- Three different locking cams for compression and security
- 36mm cam travel guarantees optimal striker entry depth in the striker
- High level of security as standard
- Easy upgrade to BS7950 Security Specification
- All surfaces coated with ROTOSIL which exceeds the requirement of BS7479, DIN 50 021, RAL607/3, BS6375 Part 2
- Application Range
 - SRW min 360mm – max 1400mm
 - SRH min 310mm – max 2400mm
 - Max sash weight 100kg






Quality Door and Window Fittings

(Timber) NT 'R' HINGE CONCEALED TILT BEFORE TURN

T3 0907 Product by ROTO

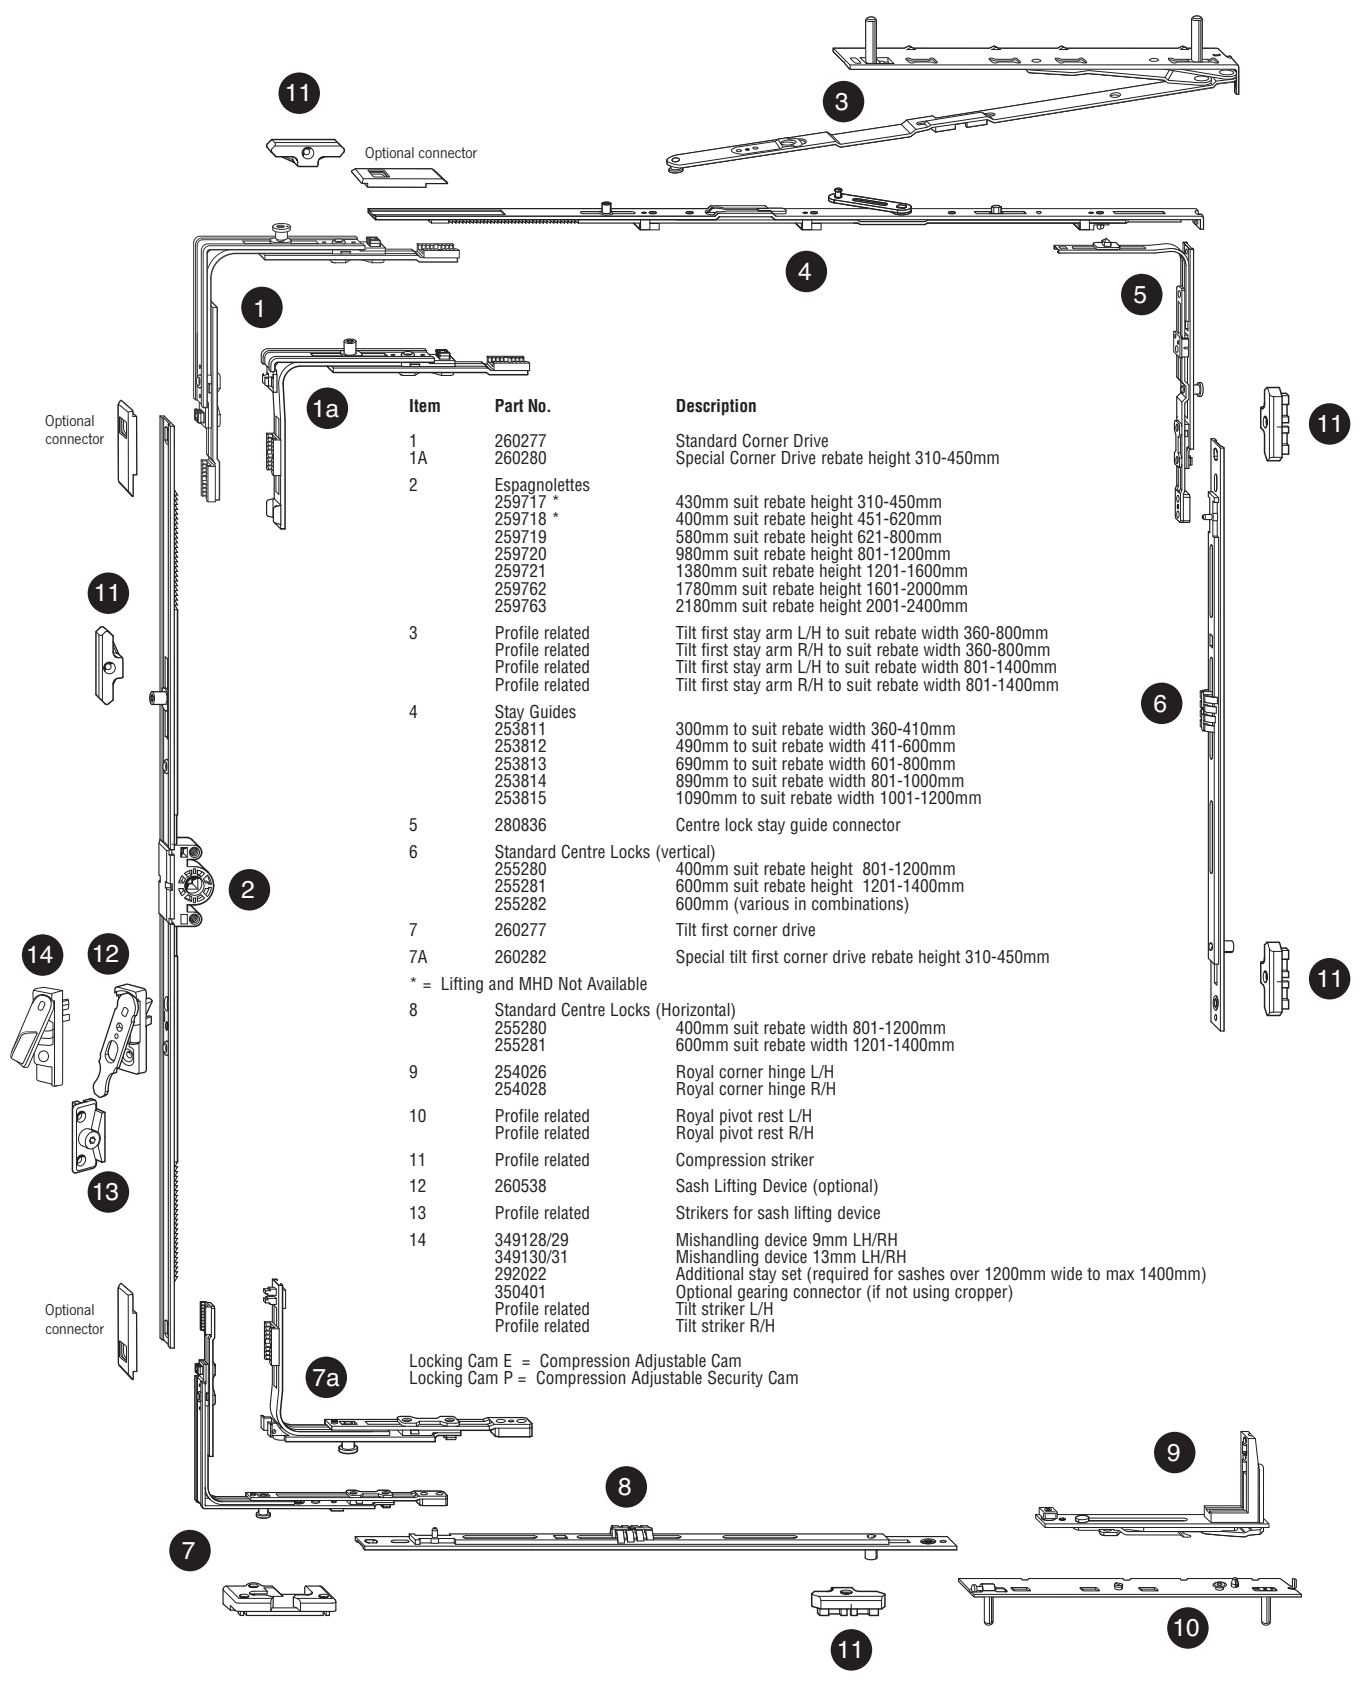

Item	Part No.	Description
1	260277	Standard Corner Drive
1A	260280	Special Corner Drive rebate height 310-450mm
2	Espagnolettes	
	259717 *	430mm suit rebate height 310-450mm
	259718 *	400mm suit rebate height 451-620mm
	259719	580mm suit rebate height 621-800mm
	259720	980mm suit rebate height 801-1200mm
	259721	1380mm suit rebate height 1201-1600mm
	259762	1780mm suit rebate height 1601-2000mm
	259763	2180mm suit rebate height 2001-2400mm
3	Profile related	Tilt first stay arm L/H to suit rebate width 360-800mm
	Profile related	Tilt first stay arm R/H to suit rebate width 360-800mm
	Profile related	Tilt first stay arm L/H to suit rebate width 801-1400mm
	Profile related	Tilt first stay arm R/H to suit rebate width 801-1400mm
4	Stay Guides	
	253811	300mm to suit rebate width 360-410mm
	253812	490mm to suit rebate width 411-600mm
	253813	690mm to suit rebate width 601-800mm
	253814	890mm to suit rebate width 801-1000mm
	253815	1090mm to suit rebate width 1001-1200mm
5	280836	Centre lock stay guide connector
6	Standard Centre Locks (vertical)	
	255280	400mm suit rebate height 801-1200mm
	255281	600mm suit rebate height 1201-1400mm
	255282	600mm (various in combinations)
7	260277	Tilt first corner drive
7A	260282	Special tilt first corner drive rebate height 310-450mm
* = Lifting and MHD Not Available		
8	Standard Centre Locks (Horizontal)	
	255280	400mm suit rebate width 801-1200mm
	255281	600mm suit rebate width 1201-1400mm
9	254026	Royal corner hinge L/H
	254028	Royal corner hinge R/H
10	Profile related	Royal pivot rest L/H
	Profile related	Royal pivot rest R/H
11	Profile related	Compression striker
12	260538	Sash Lifting Device (optional)
13	Profile related	Strikers for sash lifting device
14	349128/29	Mishandling device 9mm LH/RH
	349130/31	Mishandling device 13mm LH/RH
	292022	Additional stay set (required for sashes over 1200mm wide to max 1400mm)
	350401	Optional gearing connector (if not using cropper)
	Profile related	Tilt striker L/H
	Profile related	Tilt striker R/H

Locking Cam E = Compression Adjustable Cam
Locking Cam P = Compression Adjustable Security Cam